


SRD Isolation container

Description

Upon receipt of an activation signal from the Fike EPACO™ explosion protection system, the standard rate discharge (SRD) container discharges explosion isolation powder into the protected volume. The powder chemically extinguishes the combustion reaction preventing the explosion to propagate to other parts of the installation.

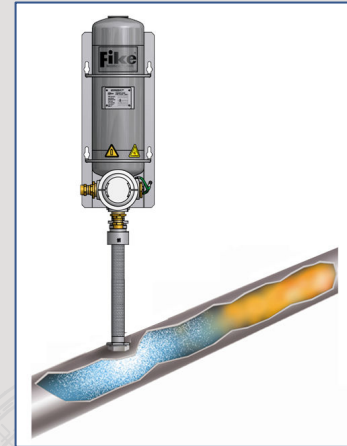

Features and Benefits

- Unique design with unequalled reaction speed
- Virtually maintenance free
- Easy servicing
- Process connections can be saddled for easy mounting on round duct work
- Flexible connections facilitate the maintenance

Specifications

Type	SRD (standard rate discharge isolation container)
Executions	8.4 litre
Process connection	1" Weld-on fitting / weldless process fitting (for flexibles only) – 1.4404 (316L SST)
Flexibles	0.5m or 1m – 1.4401 (316 SST)
Extinguishing agent	Sodium Bicarbonate (SBC) Dessikarb (food grade quality) Mono Ammonium Phosphate
Explosion hazard	Combustible dusts (including St 3), gases and hybrid mixtures
Initiator	Gas cartridge actuator (GCA)
Maximum operating temperature	120°C (higher temperatures on demand)
Ambient temperature	-40°C to +55°C
Fill pressure (N ₂)	34 barg @ 22°C
Ex marking	ATEX II 2/1 GD EEx d IIC T6 / IP66 T85°C
Painting specifications	Primer: high build 2-component zinc phosphate primer Finish: white high build 2-component coating
Material specification	Container: nickel plated carbon steel Initiator housing: SST Manometer: SST Junction box: aluminium

Accessories

- Low pressure monitoring system

8.5501.00.3

All above data are subject to change without notice. They must not be used unless confirmed in writing.

Fike Europe B.v.b.a • Toekomstlaan 52 • B2200 Herentals • Belgium
Tel. +32 14 210031 • Fax +32 14 210743 • email fike-europe@fike.com • website: <http://www.fike.be>

Fike United Kingdom • Maidstone • England
Tel. +44 1 622 677081 • Fax +44 1 622 685737 • email sales@fike.co.uk • website: <http://www.fike.co.uk>